

Localizing Of The Data Storing Structure By Means Of Tyre Pressure Monitoring System

Sivaraos, M.J.Raguvaran, R.Sundram, J.Usha

Abstract: Tyre pressure plays an important role in ensuring safe operation and performance of a motor vehicle. Improper monitoring of tyre pressure always results in reduction of gas mileage, tyre life, vehicle safety and performance. Studies reflect that properly inflated tyres can increase tyre life span up to 20% which is equivalent to extra 9 months of its life span; saves fuel from 4% to 10%; increase braking efficiency up to 20%; lightens steering system and ease self-steer. Monitoring proper tyre pressure using manual gauges are less effective as they tend to provide slight gap at the valve for air leakage during pressure checking. Therefore a device called Tyre Pressure Monitoring System (TPMS) is used in the current research to efficiently monitor tyre pressure and temperature in a tyre of a motor vehicle which then generates a signal indicative of the pressure and temperature in each of the tyre thus increasing the monitoring system efficiency of a vehicle and its safety. This paper presents a cost effective real-time data plotting application based on LabVIEW graphical user interface using a TPMS device. Notably, the entire system is tailored to the situation whereby with the existence of this interface; tyre researchers, engineers and scientist would able to effectively monitor and simultaneously plot the tyre pressure and temperature data even at dynamic condition.

Keywords: Tyre Safety, Tyre Pressure, Tyre Temperature, TPMS and LabVIEW

INTRODUCTION

Improperly inflated tyres are noticed to be fairly common problems on passenger vehicles and would equally causes critical impacts on safety and motoring cost. In fact, 80% of passenger vehicles on the road are observed to have at least one under-inflated tyre and 36% of passenger cars have at least one tyre that is 20% or more under-inflated [1]. Research finding also shows that every tyre pressure drop of 10 to 20 kilopascal a month is equivalent of adding a 70 kilogram person into a car [2] and causes overloading due to the 'virtual' passenger condition. The facts are that, tires with proper inflated pressure can safe its life up to 20% which is nine months more of its life span, save fuel from 4% to 10%, increase braking efficiency up to 20%, lightens vehicle steering system and ease self-steer. Often pressure losses in a tyre are associated with natural permeation of the gas through the elastic rubber of the tubeless tyre material [3] with the presence of high operating temperature [4-8]. Improper monitoring of the tyre pressure is one of the main reasons resulting in tyre failure and regular usages of common air pressure kiosk usually doesn't provide accurate readings of the tyre pressure. Drivers usually do not check tyre pressure unless they notice unusual vehicle performance and furthermore visual checks are often insufficient to determine tyre condition. Therefore, tyre pressure maintenance system (TPMS) was introduced and due to its importance which plays a vital role in vehicle safety system, it is a mandatory system to be installed in most of the foreign production vehicles nowadays [9].

A modern TPMS system can notify the driver on current tyre pressure and temperature level and warn the driver on when a tyre needs to be inflated [10]. By using the application of a TPMS, a graphical user interface are being organized and designed on LabVIEW which consist of real-time data monitoring, plotting and data storing of the tyre pressure and temperature continuously and simultaneously even during dynamic condition when the vehicle begins to travel. Furthermore, the characteristic and behaviour of a vehicle tyre can be studied and analysed effectively by scientist and more importantly tyre researchers using this developed graphical user interface. Besides that, it possesses many advantages such as easy to be maintained, a "plug & play" portable system, alerts users automatically and instant graph plotting.

Tyre Pressure Monitoring System

Basically, a tyre pressure monitoring system (TPMS) monitors the air pressure in the tyres of a vehicle, which eventually generates a signal indicative of the tyre pressure in each of the tyre which indirectly increase motoring safety and performance [11]. It is also described as driver-assist system that warns the driver when the tyre pressure is below or above the prescribed limits according to the vehicle manufacturer's guide [12]. Each tyre inflation pressure is identified and measured by a pressure sensor fitted internally in the rim. As the pressure is measured, it is transmitted through its transmitter and sensor. Next, the transmitted signals are received, decoded and processed by the receiver to trigger a warning indicator through an alarm lamp, audible lamp and pressure display unit mounted on the dashboard in the driving compartment which functions as a receiver for the driver to take immediate action to curb the problem. Figure-1 shows the basic TPMS setup in a vehicle.

- Sivaraos, Faculty of Manufacturing Engineering, Universiti Teknikal Malaysia Melaka (UTeM) Email: sivarao@utem.edu.my
- M.J.Raguvaran, Faculty of Manufacturing Engineering, Universiti Teknikal Malaysia Melaka (UTeM) Email: superagu911@gmail.com
- R.Sundram, Faculty of Electrical Engineering, Universiti Teknikal Malaysia Melaka (UTeM) Email: sundram2@student.utem.edu.my
- J.Usha, School of Engineering and IT, INTI International Universiti Email: usha.jayahkudy@gmail.com

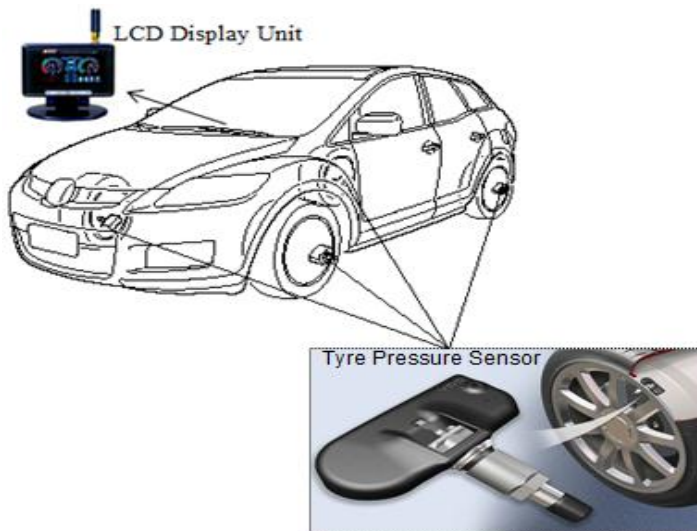


Fig 1. Basic TPMS Setup in a Vehicle

TPMS used in this research comes with a LCD Display Unit (receiver), four tyre pressure sensor (transmitter) and valve set for each tyres respectively, a power cord cigarette adapter act as a power supplier to the LCD Display Unit and a RS232 connector to convey the storage of the recorded data of tyre pressure and temperature with time-stamp in a personal computer which the data are stored in an ASCII format. The data are shown starting from tyre 1 (Front Left), tyre 2 (Front Right), tyre 3 (Rear Right) and finally tyre 4 (Rear Left) in a 30 second period clockwise manner. After proper installation and pre-setting, this particular TPMS informs the driver not only the accurate and up-to-date tyre pressure but its temperature too; and upon detection of any irregularities in the tyre pressure or temperature, it will immediately notify the driver by sounding an alarm and flash on the LCD display. Normally, this situation happens if there is any problem of either slow or fast tyre air leakage. Figure-2 reveals the detailed specifications [13] of the TPMS sensor/transmitter and receiver unit.

Sensors/Transmitter Specifications

Battery life	Estimated 5 to 7 years (under normal operating condition)
Battery voltage	3 V
Storage Temperature	-55°C to 125°C
Operating Temperature	-40°C to 125°C
Temperature Resolution	±3°C
Pressure range	700kPa (Car), 1400kPa (Truck)
Pressure Resolution	2.66kPa (Car), 5.5kPa (Truck)
Operating Humidity	100%
Operating Frequency	434 MHz

Receiver Specifications

Operating Voltage	9V to 18V
Operating Temperature	-20°C to 85°C
Monitored Temperature	-40°C to 100°C

Fig 2. TPMS Sensor and Receiver Specifications

LabVIEW System

Laboratory Virtual Instrumentation Engineering Workbench (LabVIEW) is a graphical programming environment well suited for high-level and system-level design which is developed by National Instrument (NI). This programming approach is based on building block diagrams called Virtual

Instruments (VI). To date, this software package is one of the first and advanced graphical programming product and predominantly used in industries and academic sectors for data analysis, data acquisition, simulation and remote control [14, 15]. The LabVIEW programming software used in this research are installed with Report Generation Toolkit compatible for Microsoft Office. It is an 'add-on tools' library of flexible, easy to use VI's for programmatically creating and editing Microsoft Word or Excel reports from the LabVIEW system. It also enables to generate, summarize, compile and store test results/data or reports of the entire system for various professional usage [16-18]. A proper VI consists of the following main components [19]:-

- Front Panel = serves as the user interface
- Block Diagram = contains the graphical source code that describes the functionality of the Virtual Instruments (VI)
- Icon and Connector Panel

The LabVIEW system used for this research is mainly for retrieving the data which is the internal tyre pressure and temperature from the TPMS sensor of all the tyre and instantly plot and store the obtained data according to the "Date and Time" frame. Figure-3 discloses the complete flow-chart of the LabVIEW system used in this research.

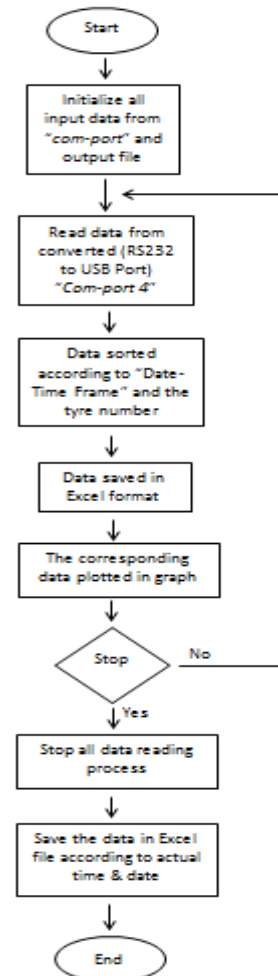


Fig 3. Flow chart of the overall LabVIEW system

As the system starts, it will initialize all the input data from the connected PC communication port (COM-port). Next, it will begin to read the data from the converted (RS232 to USB port) which used as "COM-port 4" in the front panel and block diagram of the complete interface as exposed in Figure-4 and Figure-5 while, the basic communication settings on the front panel of the system are listed as below:-

- i. COM port name = COM 4
- ii. Data bits = 8
- iii. Byte count = 20
- iv. Parity bit = 0 (none)
- v. Timeout (10sec) = 10000
- vi. Boundary rate = 115200

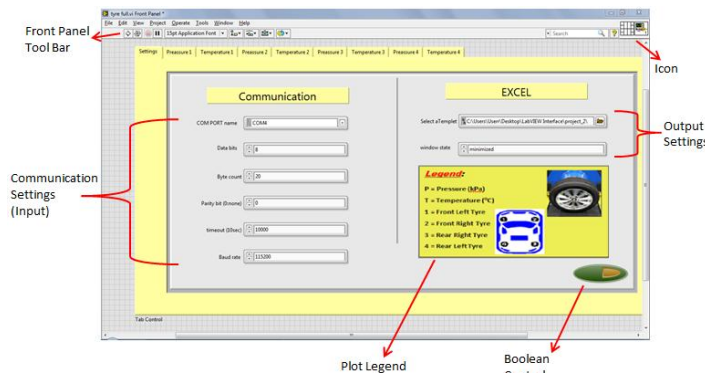


Fig 4. Front Panel of the Interface

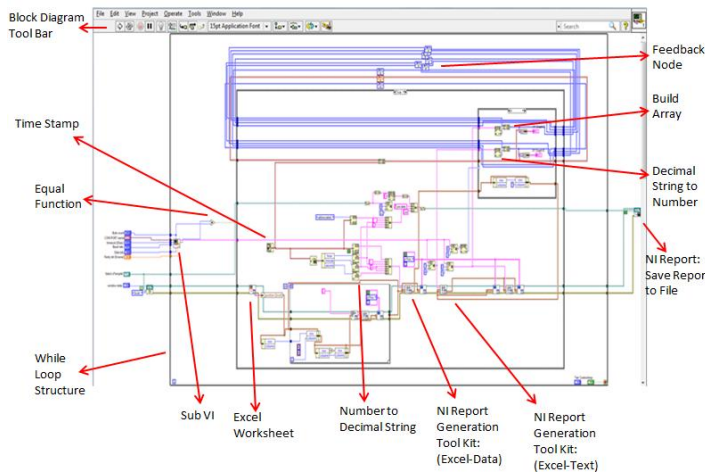


Fig 5. Block Diagram of the Complete System

Then, the data is sorted according to the "Date-Time Frame" and the tyre number starting from tyre 1 (Front Left), tyre 2 (Front Right), tyre 3 (Rear Right) and finally tyre 4 (Rear Left) in a 30 second period. As the readings of the tyre pressure in kilopascal (kPa) and temperature in degree Celsius (°C) saved as excel template in PC, it will auto-plot the data in a graph simultaneously as displayed in Figure-6 and Figure-7. Two graphs for each tyre are developed which is the graph for pressure versus time and temperature versus time for all the tyres. This enables us to instantly detect any slight changes either on any particular tyre pressure and temperature. If the system is stopped, it will immediately pause all the reading process and save the final received data in Excel template according to the PC date and time; otherwise it will

continuously repeat all the functions from retrieving the data to auto-plotting in a graph until the system is finally stopped.

Tire Pressure Monitoring System - AVE TPMS									
Date - Time	Pressure 1	Temperature 1	Pressure 2	Temperature 2	Pressure 3	Temperature 3	Pressure 4	Temperature 4	
0	0	0	0	0	0	0	0	0	0
4	14/12/2014-12:35:54	225	34	228	34	225	35	237	35
5	14/12/2014-12:36:36	225	34	228	34	225	35	237	35
6	14/12/2014-12:37:6	225	35	228	34	225	35	237	35
7	14/12/2014-12:37:27	225	35	228	34	225	35	237	35
8	14/12/2014-12:37:59	225	35	228	34	225	35	239	35
9	14/12/2014-12:38:30	225	35	228	34	225	35	239	35
10	14/12/2014-12:38:31	225	35	228	34	225	35	239	35
11	14/12/2014-12:38:46	225	35	228	34	225	35	239	35
12	14/12/2014-12:39:1	225	35	228	34	225	35	239	35
13	14/12/2014-12:39:9	228	34	228	34	225	35	239	35
14	14/12/2014-12:39:17	228	34	228	34	225	35	239	35
15	14/12/2014-12:39:39	228	34	228	34	225	35	239	35

Fig 6. Data saved in Excel Template

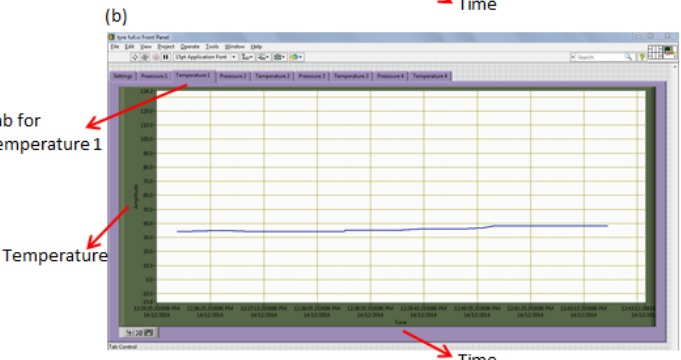
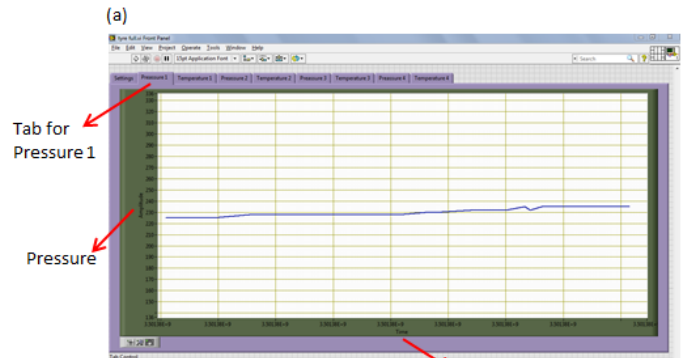


Fig 7. Auto-Plotted Graph for Tyre 1

(a) Pressure vs. Time and (b) Temperature vs. Time

METHODOLOGY

In order to conduct a test on the developed LabVIEW system using TPMS application, a methodology was organized [20] to study the tyre pressure deflation rate on a car. The entire system were fitted in a road traveling car (Malaysian made Proton Perdana 2.0 litre, V6) as shown in Figure-8 where it weighs about a metric tonne. The tyres used for this were of the same widely commercialised (xx) brand with the aspect ratio 205/55R16 in similar conditions and initially inflated at 230kPa with compressed air.



Fig 8. Tyre Pressure Deflation Test Setup on a Vehicle

For this test, all four tyres (Tyre 1: Front Left), (Tyre 2: Front Right), (Tyre 3: Rear Right) and (Tyre 4: Rear Left) are tested and monitored. The vehicle was being driven at 300km straight-stretch without passengers and additional load, three times in a month (seven days interval each time) and finally obtained the pressure drop rate in all four tyres. The speed of the vehicle while driving was limited, ranging from 70km/h to 90km/h. All the readings are measured and stored from the date the test was started, while driving and exactly 30 days from the date as the vehicle complete its driving requirements within. The objective of this experiment is to differentiate and evaluate the pressure drop of the tyre condition and ultimately the performance, reliability, usability, efficiency and ability of the developed LabVIEW system in monitoring, recording and auto-plotting the retrieved data of tyre pressure and temperature in each tyres respectively during dynamic condition.

RESULT AND DISCUSSION

After 30 days of experiment, the complete readings of pressure and temperature for all the tyres during dynamic condition are obtained and plotted in a graph as shown in Figure-9 for the first 300km straight-stretch attempt. During this trial, the pressure for the entire tyre increases gradually with temperature and time and become static after travelling 40 minutes.

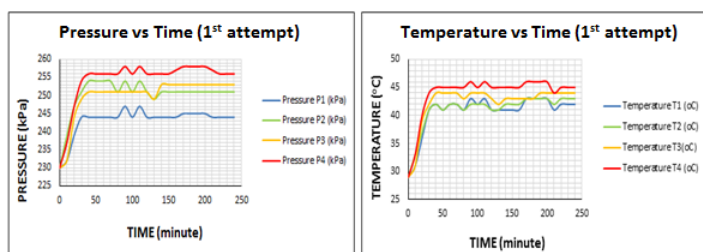


Fig 9. Pressure and Temperature Variation over Time during First 300km Attempt

During interval (seven days from the first 300km attempt), the car was parked in a closed compartment to reduce any external environment temperature variance which could affect the entire testing. Before the second 300km attempt, the pressure for tyre 1 and 3 is noticed to be deflated to 218kPa

where else tyre 2 and 4 deflated to 221kPa. The pressure for all the tyre increases gradually with temperature and time and become static at 40th minute and continue to rise moderately until at 180th minute. All the data are tabulated in Figur-10.

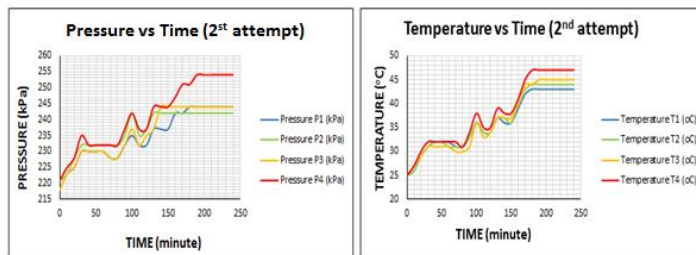


Fig 10. Pressure and Temperature Variation over Time during Second 300km Attempt

After another seven days interval from the second 300km attempt, the pressure for tyre 1, 2 and 3 is observed at 223kPa and 197kPa for tyre 4. The pressure and temperature for both the tyre increases simultaneously and arrives to a steady-state form at 110th minute which displayed in Figure-11.

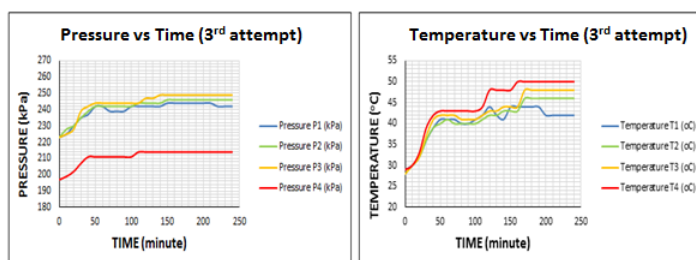


Fig 10. Pressure and Temperature Variation over Time during Third 300km Attempt

From this retrieved data from the LabVIEW system, it reflects that after 30 days the pressure for tyre 1 is measured to be 222kPa reduces only 8kPa per month, tyre 2 with 207kPa reduces 23kPa, tyre 3 with 221kPa reduces 9kPa while tyre 4 which experiences high temperature rise for all the “300km straight-stretch” attempt; greatly drops to 190kPa with deflation over 40kPa per month. Therefore, tyre with high heat concentration experiences more air permeation which eventually leads to pressure loss [21-23].

CONCLUSION

In conclusion, the developed LabVIEW interface acts as a system to monitor the characterization and behaviour of both pressure and temperature of an automotive tyre. Moreover, it is field tested and functions very well in retrieving, recording and auto-plotting the obtained data of all four tyre pressure and temperature even at dynamic condition from the TPMS. From this system, it reflects that the tyre with highest heat concentration experiences more air permeation which ultimately leads to excessive pressure loss. Nevertheless, the developed system is considered user-friendly and easy to maintain by any individual and would be beneficial especially for tyre researchers.

REFERENCES

- [1] Purwar, S.K., 2017. "Automatic Tyre Inflation System", International Research Journal of Engineering and Technology IRJET, 04(04), pp. 2384-2387
- [2] Sivarao, Anand T.J.S. and Warikh M., 2009. "Engineering of Tyre Pressure Controlling Device: An Invention towards Successful Product Development", International Journal of Basic & Applied Sciences IJBAS-IJENS, 9(09), pp. 45-48
- [3] Bo Li., Shaoyi Bei., and Jingbo Zhao., 2017. "Research Method of Tyre Contact Characteristic Based on Modal Analysis", Mathematical Problem in Engineering, Hindawi, Article ID 6769387, pp. 1-9
- [4] Ejsmont, J., Taryma, S., Ronowski, G., and Zurek, B.S., 2018. "Influence of Temperature on the Tyre Rolling Resistance", International Journal of Automotive Technology, 19(1), pp. 45-54
- [5] Tian Tang, Daniel Johnson, Robert E. Smith, Sergio D. Felicelli., 2014, "Numerical Evaluation of the Temperature Field of Steady-State Rolling Tyres, Appl. Math. Modell. 38, pp.1622-1637.
- [6] Cho J.R., Lee H.W., Jeong W.B., Jeong K.M., and Kim K.W., 2013. "Numerical Estimation of Rolling Resistance and Temperature Distribution of 3-D Periodic Patterned Tire", Int. J. Solids Struct. 50, pp.86-96
- [7] Li, Y., Zuo, S.G., Lei, L., Yang, X.W., and Wu, X.D., 2011. "Analysis of Impact Factors of Tire Wear", Journal of Vibration and Control, 18(6), pp.833-840
- [8] Kazutaka Yokota, Eisei Higuchi and Masashi Kitagawa., 2012. "Estimation of the Tire Temperature Distribution and Rolling Resistance under Running Conditions Including Environmental Factors", SAE.J. 01, pp.0796-0807
- [9] Anoop P.S., Sugumaran V., and Praveen H.M., 2016. "Implementing K-Star Algorithm to Monitor Tyre Pressure using Extracted Statistical Features from Vertical Wheel Hub Vibrations", Indian Journal of Science and Technology. Vol.9(47), pp. 1-7
- [10] Kristian Hopping and Klaus Augsburg., 2014. "Dynamic Tyre Pressure Control System – Analysis of the Effect on Longitudinal Vehicle Dynamics and Fuel Consumption", 58th Ilmenau Scientific Colloquium, Technische Universität Ilmenau, 164:2, pp. 1-12
- [11] Ambarish G. Mohapatra., 2011. "Design and Implementation of Diaphragm Type Pressure Sensor in a Direct Tyre Pressure Monitoring System (TPMS) for Automotive Safety Applications", International Journal of Engineering Science and Technology (IJEST), Vol.3 No.8, pp.6514-6524
- [12] Sankaranarayanan Velupillai and Levent Guvenc., 2007. "Applications of Control – Tyre Pressure Monitoring", IEEE Control Systems Magazine, December 2007, pp.22-25
- [13] Information on <http://www.avetechnology.com/usermanual>
- [14] Tamada, R., and Shiraishi, M., 2017. "Prediction of Uneven Tyre Wear Using Wear Progress Simulation", Tire Science and Technology, 45(2), pp.87-100
- [15] Basil Hamed., 2010. "Application of a LabVIEW for Real-Time Control of Ball and Beam System", IACSIT International Journal of Engineering and Technology, Vol.2 No.4, pp.401-407
- [16] Ruban N., Guneet Pal Singh Arneja., Kapil Bansal and Mathew M. Noel., 2012. "Heart Sound Analysis using LabVIEW", Journal of Theoretical and Applied Information Technology, Vol.46, No.2, pp.1029-1033
- [17] Bhavin Mehta, Divya Rengarajan and Ankit Prasad., 2012. "Real Time Patient Tele-Monitoring System using LabVIEW", International Journal of Scientific and Engineering Research, Vol.3, No.4, pp.1-11
- [18] Hemalatha B., Vimala Juliet A. and Natarajan N., 2010. "Boiler Level Control using LabVIEW", International Journal of Computer Applications, Vol.1, No.17, pp.85-88
- [19] LabVIEW User Manual, Part Number: 320999E-01, April 2003 Edition, National Instruments
- [20] Huang M.X., Li Z. and Xia Y.M, 2012, "The Interior Temperature Distribution Measurement in a Rolling Tire", Proceedings of 2012 International Conference on Mechanical Engineering and Material Science (MEMS), pp.311-313
- [21] Hackl, A., Scherndl, C., Hirschner, W., and Lex, C., 2017, "Experimental Validation of Various Temperature Models for Semi-Physical Tyre Model Approaches", IOP Conference Series: Materials Science and Engineering, 252(1), pp.1-8
- [22] Robert D. Fogal., 2010, "Tyre Sealant Composition", US Patent 7,807,732 B2
- [23] Takahiro Okamoto., 2014, "Tyre Puncture Sealant", The Yokohama Rubber Co.Ltd. Kanagawa 254-8601 (JP), EP Patent 1,825,991 B1