

# Design Of Android Based On Children Tracking Location Monitoring System

Marti Widya Sari, Desinta Ningrum Belsa Putri, Banu Santoso

**Abstract:** Every parent has many activities or activities that cannot be avoided. This activity reduces supervision and monitoring of every activity of their children. Parents' concerns in terms of monitoring the presence and monitoring of children's activities become one of the problems that are often faced. Training children to prepare themselves to face this sometimes dangerous world, first develop a sense of security in themselves. It is natural to occasionally remind a child of the possibility of being abducted or cheated by someone who has not been or is already known to him without having to mean overprotecting him. Improved supervision of children is needed without reducing the freedom of children to learn and explore their environment. One alternative that allows tracking the presence, location and accuracy is quite good is to use a Geo Positioning System (GPS). This GPS is packaged in a flexible form so that it can help make it easier for parents to supervise their children in the range of areas that are still accessible to them and find the child's position when separated from their parents. The integrated Google API integrated application is very helpful in tracking because parents are able to estimate the tracker's rough position. The system can send the location information of children who are lost or lost on smartphone applications used by parents. This GPS belt application has been able to provide convenience to parents in tracking or to find out the child's whereabouts.

**Index Terms:** tracking, application, monitoring system, GPS, children

## 1. INTRODUCTION

In terms of the growth of reason, children from the age of four to five years have a great curiosity about the surrounding environment and all information related to it [1]. Children at this age have advantages in the form of an adventurous spirit, high spirits, and like challenges. Children's activities can be divided into two main groups, namely active play and passive play or known as entertainment. Active play is a play activity that involves the child's physical movements and activities, such as running, going up and down stairs, playing sand, and others [2]. Conversely, passive play is entertaining and does not involve child gestures, such as observing other children playing, watching television, and playing video games. The development of a child that is different from one child to another, this is the stage of the child's stage of growth and development [3]. At this stage of growth and development which is in the golden phase tends to be more interested in exploring things around them [4]. When exploring this, children are interested in the surrounding environment, for example in open spaces where parents play an important role in monitoring the activities of children who are outside [5], [6]. Train children to prepare themselves to face this sometimes dangerous world, first develop a sense of security in themselves. It is natural to occasionally remind a child of the possibility of being abducted or cheated by someone he has not yet known or has known [7]. But, it does not mean having to over-protect it. It is not wise to forbid a child from going out the fence, while the child wants to play with neighbors outside the house. Or continue to accompany them in all their activities. Attitudes like this will increase a child's fear of things that are foreign to him. Increased supervision of children is needed without reducing the freedom of children to learn and explore their environment [8]. For this we need a tool or system that can help make it

easier for parents to supervise their children in the range of areas that are still reachable by them and find the child's position when separated from their parents. The objectives of this research are to generate a system or application to track the whereabouts of children through smartphones that can be used by both parents of the child, and to design device that can be used practically and children can be traced to the presence of wireless media by their parents.

## 2 RELATED WORKS

Research conducted by [9] about the system of monitoring the location of children using geofencing on the Android platform. This research discusses how geofencing works a virtual perimeter on a geographical area using location services, using the android platform. While the author will create applications with the Delphi Embarcadero Xe8 programming and on the web using PHP MySQL. Then the research carried out by [10] about the design of information systems for tracking and monitoring web-based shipment packages with the help of an android mobile, and using GPS to find out the location of tracking and monitoring of shipment packages. Then, research conducted by [11] discusses the use of GPS for use in health research. Research conducted by [12] about assessing the spatial location of physical activity behavior. While the authors will make the tracking and use of Google maps to cover the whole world map and will be more accurate. With the review of the literature listed above, the methods and tools used are generally the same, but what distinguishes the research that will be made by the author is the place or media of application, the materials to be used as well as the objects examined and used as building designs child tracking system using GPS tracker uses technology that will be designed by itself and built on this final project that uses a microcontroller service and android interface as a controller for child tracking [13],[14].


## 3 METHODS

### 3.1 System Design

This system uses the ESP8266 wifi module which is used as an access point to access other devices through the internet network [15]. this device is commonly used in systems that are used based on internet of things (IoT) [16],[17]. The system


- Marti Widya Sari and Desinta Ningrum Belsa Putri from Department of Informatics, Faculty of Science and Technology, Universitas PGRI Yogyakarta, Jl. PGRI I No. 117 Yogyakarta, 55182, Indonesia
- Banu Santoso\* from Department of Computer Engineering, Faculty of Computer Science, Universitas AMIKOM Yogyakarta, Indonesia
- \*Corresponding author email: [banu@amikom.ac.id](mailto:banu@amikom.ac.id)

designed also utilizes GPS technology for tracking, as shown in Fig. 1.

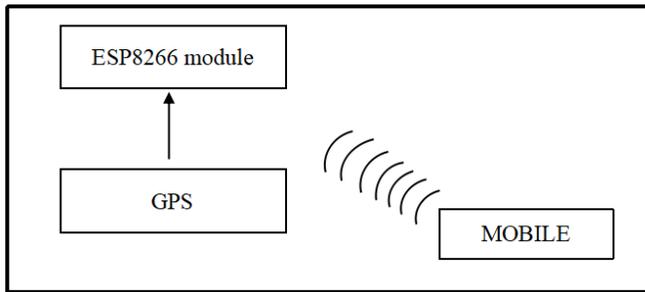

**Fig. 1. System Design**


When tracking first for a child search, GPS sends to ESP8266 the location data of the child's presence. Furthermore, when an order from mobile for tracking is obtained, ESP responds and continues sending data from GPS to mobile.

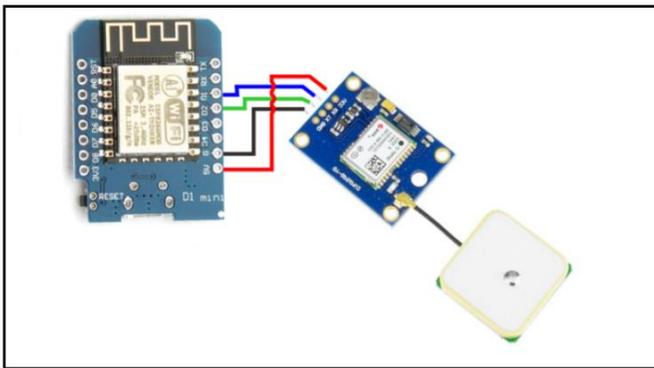

**Fig. 2. Hardware Design**

Fig. 2. is the steps or making that is applied to the system and has been arranged in such a way that it is neater. The hardware running after compiled in terms of cabling or connection between hardware, then the coding of the NodeMCU microcontroller is required. The hardware components used are as follows.

- a. GPS Antenna  
The GPS antenna for the Neo 6 GPS module at the top is expected to produce NMEA data from more GPS satellites perfect.
- b. Module GPS Neo 6  
Laying the Neo 6 GPS module in the middle position between the antenna and the NodeMCU microcontroller. This arrangement is more practical and efficient because the Neo 6 GPS module has communication between the two hardware.
- c. Microcontroller NodeMCU  
Laying NodeMCU with the lowest position after the antenna module and the GPS module Neo 6. The bottommost position is because the microcontroller works without using signals, only communicates with the GPS module.

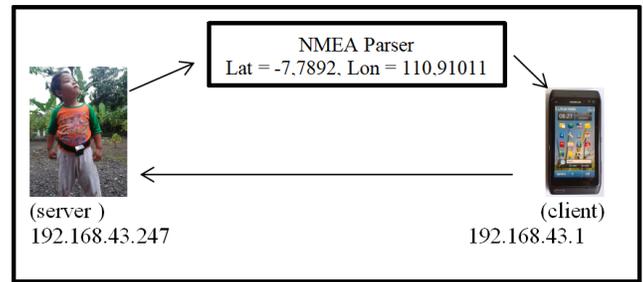

**Fig. 3. Data Exchange Process**

In Fig. 3. the Arduino requests data from the neo 6 GPS 6 module, and the neo 6 GPS takes data from the satellite in the form of NMEA data. NMEA data is sent to Arduino and filtered to retrieve location coordinate data only by Arduino. The coordinate data is sent via wireless communication to the smartphone. Coordinate data on smartphones is accessed via google maps which are accessed using the Google Maps API.

### 3.2 System Implementation

Monitoring system implementation for tracking system application consist of Login Form, Main Menu Form, Child list to be used for tracking and Tracking Form.

- a. Login Form  
The login form functions to enter the child tracking system menu by the user that is the child's parents, to be able to access the next page the user must enter a username and password that has been registered in the system database.
- b. Main Menu Form  
On the home menu there is a child search radar as the most important menu contents for the child search process, then there is a menu for adding new users and a list of children that will be monitored by the user. In the home menu, a list of some children registered in the database will be monitored by parents of the child search google map.
- c. Child List  
On the child list menu is monitoring by the child tracking system, there are several forms that must be filled in there is a name, IP address of the GPS belt attached to the child and the child's birth date. Delphi XE 8.
- d. Tracking Form  
In the tracking form a map will appear that points the location of the child the user will be looking for. There are two locations that indicate the whereabouts of parents and missing children. In this menu the user will be directed where to look for his child. The functionality of this form in its implementation is used coding or programming in systems that use the Delphi XE 8 application.

## 4 RESULTS

### 4.1 System Testing

Testing is done to test the level of system success. This research was tested by the author himself, assisted by the author's son. The tracking device is used by children and children are told to play with it. Subsequent testing of parents, in this case the author will try to measure and track the IP

device is still connected or detected within a certain distance and radius in the presence of a barrier object in the form of a building and the absence of any barrier. The author monitors signal detection by using applications that have been made.

#### 4.2 Results

Monitoring system testing is carried out in a number of circumstances, for example without obstacles and with obstacles. The barriers used are doors, wall, buildings and trees. The purpose of testing using obstacles or not is to know that the system can be connected to the source or not. In testing this system is recorded in the test results table presented in the Table 1, Table 2, Table 3, Table 4, Table 5 and Table 6. The distance used for testing the system is from 5 m to 50 m, with obstacles and without obstacles.

**Table 1. First Testing Result**

Distance	Obstacle	Status
5 m	Door	Connected
10 m	Door	Connected
15 m	Door, house	Connected
20 m	Door Opened	Not Connected

**Table 2. Second Testing Result**

Distance	Obstacle	Status
5 m	One Building	Connected
10 m	One Building	Connected
15 m	Two Building	Connected
20 m	Two Building	Connected
30 m	Two Building	Not Connected

**Table 3. Third Testing Result**

Distance	Obstacle	Status
5 m	Three Building	Connected
10 m	Three Building	Connected
15 m	Three Building	Connected
20 m	Three Building	Connected
25 m	Three Building	Not Connected

**Table 4. Fourth Testing Result**

Distance	Obstacle	Status
5 m	2 <sup>nd</sup> Floor Building	Connected
10 m	2 <sup>nd</sup> Floor Building	Connected
15 m	2 <sup>nd</sup> Floor Building	Connected
20 m	2 <sup>nd</sup> Floor Building	Connected
25 m	2 <sup>nd</sup> Floor Building	Connected
35 m	2 <sup>nd</sup> Floor Building	Connected
40 m	2 <sup>nd</sup> Floor Building	Connected
45 m	2 <sup>nd</sup> Floor Building	Not Connected

**Table 5. Fifth Testing Result**

Distance	Obstacle	Status
5 m	Trees	Connected
10 m	Trees	Connected
15 m	Trees	Connected
20 m	Trees	Connected
25 m	Trees	Connected
35 m	Trees	Connected

40 m	Trees	Connected
45 m	Trees	Connected
50 m	Trees	Not Connected

**Table 6. Sixth Testing Result**

Distance	Obstacle	Status
5 m	Wall/Fence	Connected
10 m	Wall/Fence	Connected
15 m	Wall/Fence	Connected
20 m	Wall/Fence	Connected
30 m	Wall/Fence	Connected
35 m	Wall/Fence	Connected
40 m	Wall/Fence	Connected
45 m	Wall/Fence	Connected
50 m	Wall/Fence	Not Connected

The tables above are test results based on distance and radius trials in detecting devices with applications whether connected or not when there are obstacles in the form of buildings, buildings and trees.

## 5 CONCLUSION

From the series of research and testing tools that have been done on the author, it can be concluded that the creation of a child's tracking system through a smartphone has been running and succeeded with a good success rate and in accordance with the system design concept and can be used by both parents of the child because the display is easy to understand overall. Then, making the system devices can be used comfortably like a practical child belt and can be tracked by the child's presence on the wireless media by his parents. System testing has been carried out, both using obstacles or without obstacles, and with different distances, ranging from 5 meters to 50 meters. The obstacles used for system testing are doors, walls, fences, buildings and trees. The monitoring system in this study, only carried out for testing at a maximum distance of 50 meters. For further research, a tracking application for the location of children can be designed that can reach longer distances, more than 50 meters. Then it can be added with other features and information related to the location search of children.

## ACKNOWLEDGMENT

This research and publication are supported by Department of Informatics and The Team of Acceleration of A Reputable International Journal, Universitas PGRI Yogyakarta

## REFERENCES

- [1] D. G. Rainham, C. J. Bates, C. M. Blanchard, T. J. Dummer, S. F. Kirk, and C. L. Shearer, "Spatial Classification of Youth Physical Activity Patterns," *AMEPRE*, vol. 42, no. 5, pp. e87–e96, 2012.
- [2] X. Yang, R. Jago, Q. Zhang, Y. Y. Wang, J. Zhang, and W. H. Zhao, "Validity and Reliability of the Wristband Activity Monitor in Free-living Children Aged 10-17 Years," *Biomed. Environ. Sci.*, vol. 32, no. 11, pp. 812–822, 2019.
- [3] T. Disney et al., "Children and Youth Services Review 'Isn't it funny the children that are further away we don

- 't think about as much?': Using GPS to explore the mobilities and geographies of social work and child protection practice," *Child. Youth Serv. Rev.*, vol. 100, no. December 2018, pp. 39–49, 2019.
- [4] C. Demant, J. Schipperijn, M. Toftager, J. Kerr, and J. Troelsen, "Health & Place When cities move children : Development of a new methodology to assess context-specific physical activity behaviour among children and adolescents using accelerometers and GPS," *Health Place*, vol. 31, pp. 90–99, 2015.
- [5] I. Fjørtoft, B. Kristoffersen, and J. Sageie, "Landscape and Urban Planning Children in schoolyards : Tracking movement patterns and physical activity in schoolyards using global positioning system and heart rate monitoring," *Landsc. Urban Plan.*, vol. 93, pp. 210–217, 2009.
- [6] B. Uldahl et al., "Contribution of various microenvironments to the daily personal exposure to ultra fine particles : Personal monitoring coupled with GPS tracking," *Atmos. Environ.*, vol. 110, pp. 122–129, 2015.
- [7] B. W. Landry and S. W. Driscoll, "Theme Issue : Exercise and Sports Physical Activity in Children and Adolescents," *PMRJ*, vol. 4, no. 11, pp. 826–832, 2012.
- [8] E. Almanza, M. Jerrett, G. Dunton, E. Seto, and M. Ann, "Health & Place A study of community design , greenness , and physical activity in children using satellite , GPS and accelerometer data," *Health Place*, vol. 18, no. 1, pp. 46–54, 2012.
- [9] R. Segara, T. Informatika, and T. Informatika, "Sistem pemantauan lokasi anak menggunakan metode geofencing pada platform android," *Teknol. Manaj. Inform.*, vol. 3, no. 1, pp. 72–85, 2017.
- [10] P. Agus, Y. Indrakarna, T. Sutanto, and V. M. Taufik, "Rancang Bangun Sistem Informasi Pelacakan dan Pemantauan Paket Kiriman Berbasis Web dengan Bantuan Mobile Android," *J. JSIKA*, vol. 1, no. 2, pp. 1–14, 2012.
- [11] J. Schipperijn et al., "Dynamic accuracy of GPS receivers for use in health research : a novel method to assess GPS accuracy in real-world settings," *Front. Public Heal.*, vol. 2, no. March, pp. 1–8, 2014.
- [12] P. J. Krenn, D. I. Mag, S. Titze, P. Oja, A. Jones, and D. Ogilvie, "Use of Global Positioning Systems to Study Physical Activity and the Environment," *AMEPRE*, vol. 41, no. 5, pp. 508–515, 2011.
- [13] B. W. Wheeler, A. R. Cooper, A. S. Page, and R. Jago, "Greenspace and children ' s physical activity : A GPS / GIS analysis of the PEACH project," *Prev. Med. (Baltim.)*, vol. 51, no. 2, pp. 148–152, 2010.
- [14] S. Duncan et al., "Portable Global Positioning System Receivers," *AMEPRE*, vol. 44, no. 2, pp. e19–e29, 2013.
- [15] B. Santoso, "Implementasi Wireless Sensor and Actuator Network Berbasis Protokol Zigbee untuk Pemantauan dan Pengendalian Smart Home," *J. Din. Inform.*, vol. 7, no. 1, pp. 13–31, 2018.
- [16] M. W. Sari, P. . Ciptadi, and R. . Hardyanto, "Study of Smart Campus Development Using Internet of Things Technology," *J. Phys.*, vol. 190, pp. 0–5, 2017.
- [17] B. Santoso and M. W. Sari, "Design of Student Attendance System Using Internet of Things ( IoT ) Technology Design of Student Attendance System Using Internet of Things ( IoT ) Technology," *J. Phys.*, vol. 1254, pp. 1–11, 2019.