

# Development And Performance Evaluation Of A Human Powered Flywheel Motor Operated Forge Cutter.

P.B.Khope, J.P.Modak

**Abstract:** - This paper addresses the development and performance of a Human Powered Flywheel Motor (HPFM) operated forge cutter. This set-up is used to cut crop residues like maize stovers, sorghum stovers in dry condition. This cut stovers can be fed to cattle directly. The current practice by small livestock farmers is to cut stover manually by axe or machetes. The mechanized cutters also available which are hand operated as well as electric motor driven. But today there is severe power shortage in country like India, particularly in rural and remote area. It is convergent to the fact that the hand muscles are weaker than leg muscles. The concept of human powered flywheel motor is used to develop the pedal operated forge cutter. In this set-up flywheel is used as a motor or a store for energy. The operator pumps the energy into flywheel by pedaling bicycle- drive mechanism with a speed rising gear pair. After a one minute pedaling is stopped, and then flywheel shaft is connected to cutter shaft. The stored energy is enough to operate cutter effectively and efficiently. The test performance of developed cutter shows the remarkable improvements over hand operated forage cutter.

**Keywords:** - Human power, forge cutter, crop residues.

## 1. INTRODUCTION:


In dry season the green grass is hardly available for cattle, the crop residues like maize stovers, sorghum stovers, pearl millet stovers etc are being used to feed the cattle. The crop residue can be feed to the cattle but they can't able to consume whole stovers and thereby 20-30% wastage. In India most of farmers have 2-3 cattle to meet their milk requirement as well as to earn some money for daily expenses. These farmers used to collect crop residues to feed directly or cut manually by crude methods using machetes into 3-4 pieces for easy intake by the cattle. This is perhaps the cost and output of electric operated cutter is high which is not appropriate for small farmers. In addition to this, in rural and remote area power supply is frequently not available. The hand operated cutters are also available. The cutting process of this type of cutter is characterized by slow operation, fatigue and low production rate. Also it is facts that hand muscles are weaker than leg muscles. It is necessary to apply human power in such a way that drudgery is minimized by applying concept of human powered flywheel motor (HPFM). Ordinarily, pedaling a stationary bicycle is a form of exercise performed for pleasure or to keep fit. It is gratifying if during such exercise the much needed power is also being supplied for cutting.

## 2. MATERIALS AND METHOD

### 2.1 Human Power

The maximum power output from a human being occurs in a rowing action because most muscle groups in the body are used. However, these outputs are loosely approached by those obtained from the legs applied to moving pedals. Little advantage appeared to be gained from pedal motions other than simple rotating cranks as on a bicycle and use of cranks gives a fairly smooth rotary motion at speeds of 60-80 RPM. Hand cranking is frequently used but as the arm muscles are smaller than the thighs, power output is reduced. The power output to be expected from normal peddlers are around 0.1HP. This output can be maintained for 60 minutes or more. Higher outputs can be produced for shorter periods. In static applications, the outputs available tend to be lower than those measured from the performance of cyclists because of the effect of winds in reducing body temperature. It may prove advantageous to provide fans for peddlers in static situations to improve output. The power levels that a human being can produce through pedaling depend on how strong the peddler is and on how long he or she needs to pedal. If the task to be powered will continue for hours at a time, 75 watts mechanical power is generally considered the limit for a larger, healthy non-athlete. A healthy athletic person of the same build might produce up to twice this amount. A person who is smaller and less well nourished, but not ill, would produce less; the estimate for such a person should probably be 50 watts for the same kind of power production over an extended period. The graph in figure1 shows various record limits for pedaling under optimum conditions. These curves states that any point on a curve indicates the maximum time that the appropriate class of person could maintain the given average power level.


- Author name is Pravin B. Khope. He is Research Scholar & Asst. Professor, Department of Mechanical Engineering, Priyadarshini College of Engineering, Nagpur, and Maharashtra State, India. Email: [khopepb@yahoo.co.in](mailto:khopepb@yahoo.co.in)
- Co-Author is J.P.Modak. He is Emeritus Professor (AICTE) & Dean (R&D), Department of Mechanical Engineering, Priyadarshini College of Engineering, Nagpur, Maharashtra State, India.

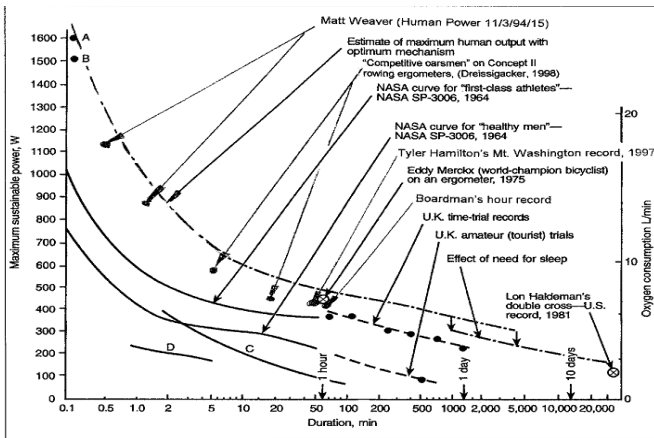

**Figure1: Variation of optimum pedaling rate with desired power output.**

**2.2 Pedaling Rate**

Human beings are very adaptable and can produce power over a wide range of pedaling speeds. However, people can produce more power--or the same amount of power for a longer time--if they pedal at a certain rate. This rate varies from person to person depending on their physical condition, but for each individual there is a pedaling speed somewhere between straining and flailing that is the most comfortable, and the most efficient in terms of power production. The predominant method of human power production was to strain with maximum strength against a slowly yielding resistance. This is neither comfortable nor efficient. Neither is the opposite extreme of flailing at full speed against a very small resistance. A simple rule is that most people engaged in delivering power continuously for an hour or more will be most efficient when pedaling in the range of 50 to 70 revolutions per minute (rpm). Figure2. For simplicity's sake, we will use 60 rpm, or one revolution of the pedal crank per second, as an easy reference value for estimates of the gear ratios required to drive a given load.

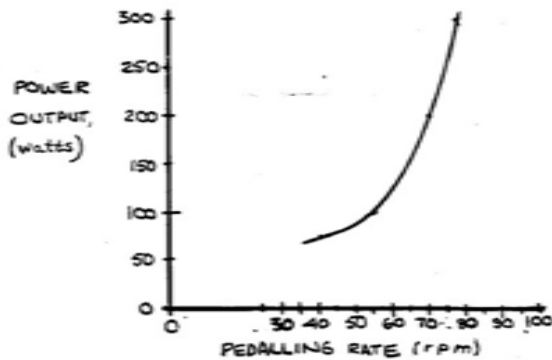


**Figure2: Human Power Output Peddling (From 'Bicycling Science' II Edition, F.R. Whitt, D.G. Wilson, MIT Press )**

**2.3 Human Powered Flywheel Motor**

The Human powered Flywheel motor comprises of three sub systems namely (i) Energy supply unit (peddling mechanism to supply power or to store energy in flywheel) (ii) Appropriate clutch and transmission and (iii) a process unit.

The complete unit consists of a bicycle mechanism, appropriate clutch and transmission system and a process unit which could be any process device needing power up to 7 hp. Referring Figure3, the rider sits on the seat and paddles the bicycle mechanism while the clutch is in disengaged position. Thus the load on the legs of the rider is only the inertia load of the flywheel. The flywheel is accelerated to the speed of 600 RPM in minutes time by a young rider of the age group of 20 to 35 physically fit of height about 165 cm. The flywheel size is one meter rim diameter, 10cm rim width and 2cm rim thickness. Such a Flywheel when energized to the speed of 600 rpm, it stores energy to the extent of 3200 kgf-m. At the end of one minute, flywheel speed is reached about 600 rpm. Then the peddling is stopped, clutch is engaged and a stored energy in the flywheel is communicated to the process unit through the clutch. Obviously the clutch is subjected to sever shock on account of instantaneous momentum transfer. This is so because as the clutches engaged, the flywheel is subjected to the process load and the process unit consumes energy of the flywheel. The energy stored in a flywheel gets exhausted in 15 to 50 seconds for application tried so far [1] to [6]. The capacity of such a system is in the range of 0.5 to 8.5 Hp. The functional feasibility and economic viability of this system has also been confirmed ([1] to [6]).

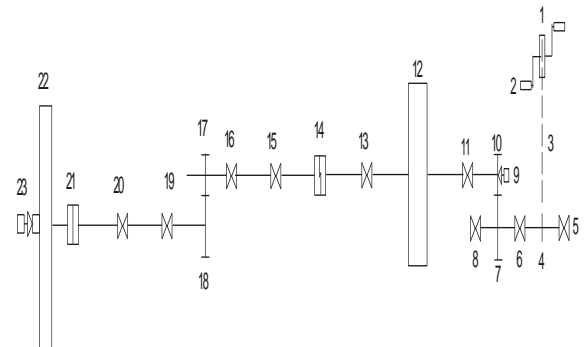


- 1-Chain Sprocket 2-Pedal 3-Chain 4-Freewheel 5,6-Bearings for bicycle side 7-Gear-I 8-Bearing 9- Optocoupler for flywheel shaft 10-Pinion-I 11-Bearing for flywheel shaft 12-Flywheel 13-Bearing for flywheel 14-Two jaw clutch 15,15-Bearing of intermediate shaft 17-Pinion II 18-Gear II 19,20-Bearing for process unit shaft 21-Coupling 22-Cutter blad 23- Optocoupler for Cutter shaft.

**Figure3: Schematic of Human Powered Flywheel Motor.**

**2.4 Design Features**

Figure 4. shows the design features of developed forge cutter energized by human powered flywheel motor.

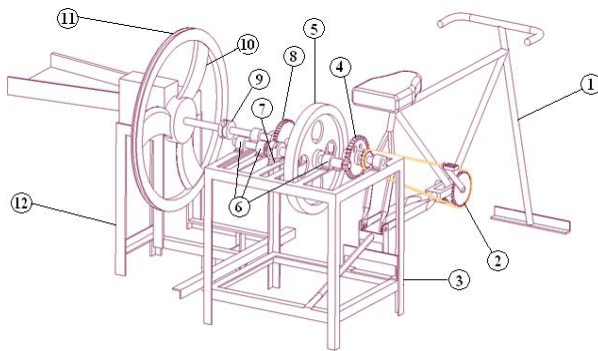

1.Cycle Stand,2.sproket,3.Frame,4.Speed Rising Gear Pair, 5.Flywheel,6.Bearing,7.Clutch,8.Torque amplification gear pair, 9.Coupling ,10.Cutter shaft, 11.Cutter blade, 12. Cutter Frame.

**Figure4. Developed experimental set-up.**

**2.4.1 The main Frame-** The frame is constructed with 65x5 mm mild steel which support all the housing for pedstals shafts for flywheel, speed rising gear pair as well as torque amplification gear pair.

**2.4.2 The operator's Unit-** This is constructed with complete bicycle unit without its wheels. It is supported by mild steel stand at front side and rear side is supported on main frame. The sproket outer diameter is 180 mm, number of teeth are 43 and freewheel outer diameter is 70 mm, number of teeth are 17 .

**2.4.3 Energy Unit-** This unit consists of consists of a flywheel, appropriate clutch and trasmission shafts. The dimensions of flywheel, hub diameter is 50mm, outer diameter is 620mm, rib width 620 mm. one side of the flywheel shaft, speed rising gear coupled with freewheel shaft, here the pinion has pitch circle diameter 50mm, face width of 28mm and number of teeth 15whereas gear used has pitch circle diameter 250mm, face width of 28mm and number of teeth 80. The specially designed spring loaded sprial jaw clutch is used to connect flywheel shaft and cutter shaft via a intermidiate torque amplification gear pair. There is a provision to change the gear for maintaining the diferent gear ratio such as 1:2, 1:3 and 1:4.

**2.4.4 The Cutting Unit-** This unit consists of following parts:

1. Cutter shaft: It is 30mm in size supported by two bearing of appropriate size. This shaft carries three armed cutter head for fixing cutting blades, angle between the arms is 120 degrees.
2. Shear plate : It supports the fodder material at the time of cutting.
3. Feed roll: A gear syetem is used to feed the fodder continously. The feed roll gives horizontal force to fodder to avoid bending or buckling during shearing . Feed rolls 250 mm long, 80mm in diameter squire tooth profile gears.
4. Cutting blade: . The thickness of cutter 2mm with the hardness of 63 HRC, width of blade 136mm, cutting blade angle 07 degrees.
5. Tip diameter of cutter: It is distence between the center of axis of cutter and point of conctect of cutter with fodder stem. First point of conctect of cutter is at

64 mm from the center of 30mm shaft. So the minimum tip diameter 79mm and last point of contact of cutter at a 280mm

6. Cutting clearance: It is distence between cutting edge of cutter and shear plate. It ranges from 0.5mm to 1.5mm, if clearance is more then there will be folding or bending of fodder stem and too small distance create unnecessary friction between blade and shear plate, loseing energy. The clearance maintained 01mm. The cutting unit is mounted on mild steel frame.

## 2.5 Performance test

For conducting trials five (05) personals from age group 22-35 were selected. The mean (+\_ SD) of age, weight, height were 26.5 +\_ 3.5 years, 68.62 +\_ 21 kg, 176.30+\_13 cm. respectively. All the trials started at 10 AM in the morning in our workshop where the room temperature varied from 25-30<sup>0</sup>c and relative humidity was 50-60% during the experimentation. During the trials, gear ratio 1:2,1:3,1:4 and number of blades also varied to 2 &3.For each gear ratio there are 2 and 3 blades. The speed of the flywheel for each gear ratio will be 300, 400,500,600 RPM. The rider operates the system similar to bicycle by peddling the pedals and spinning the flywheel to the desired speed in duration of one minutes thereby storing energy to the flywheel. After one minute peddling is stopped and flywheel shaft is connected to cutter through spiral jaw clutch and energizes the cutter. Samples of dry sorghum with 20-30% moisture having 1.85 +\_ .05 kg of about 80-120 cm tall were weighted using weighing scale. Theses samples were fed into the cutter via a feeding pan. Time taken to chop the sample was recorded with the help of real time clock integrated circuit DS1307 and microcontroller 89V51RD2.This data is saved in Personal computer by connecting microcontroller through USB connector. Thus time was recorded at all gear ratio and speed, for two and three blades. The chopped material was collected in a container and weighted to determine output. The average length of chopped material is measured by randomly selected quantity of chops.

### a) The chopping efficiency was determined as-

$$C_e = \frac{W_f}{W_c} \times 100$$

Where, Ce = Chopping efficiency

Wf = Total weight of samples fed in

Wc = Total weight of chopped out.

### b) The chopping rate was determined as-

$$C_r = \frac{W_c}{t_c}$$

Where, tc = Chopping time in seconds.

The experiment was replicated 25 times with all possible combinations of gear ratio, number of blades and flywheel speed.

## Performance evaluation results

The results of human powered cutter shows that dry sorghum is chopped at the rate of 0.017 kg/sec at 300 RPM of flywheel when gear ratio is 1:2. The average length of chopped material was found to 20-25mm. The cutting efficiency was worked out to be 81%.The chopping rate was gradually increase with increase in the flywheel speed.

At 600 RPM of flywheel and gear ratio of 1:2, the chopping rate (Cr) was 0.032kg/sec.

The chopping rate at gear ratio 1:4 and flywheel speed 300RPM was found to be 0.25kg/sec. At 600RPM with the same gear ratio the chopping rate was 0.045 kg/sec and same cutting efficiency i.e. Ce=85%

The constructed cutter energized by human powered flywheel motor was found to be effectively less tedious, faster and safer as compared to hand operated cutter. The length of chops can be varied by varying the clearance between blade and shear plate and by number of blade or speed of flywheel.

When the paddling stopped, flywheel shaft (input) is connected to cutter shaft (output), due to the resistance offered by the material to be chop the cutter speed drastically decline and finally cutter stop. For this reason it is necessary to develop appropriate mechanical transmission system which can smooth out the continuously varying speed of flywheel and will maintain approximately constant cutter speed over an estimated range of variation in flywheel shaft. Also the cutting rate (Cr) of cutter can be increased if the constant speed of cutter shaft would maintain.

The performance is a remarkable improvement over hand operated chopping since chopped size was more uniform. Therefore human powered forge cutter will find its place of importance for dairy farmers particularly in remote rural and tribal area where reliability of availability of electric power is much low or no electric power.

## CONCLUSION

1. A new type of cutter is fabricated which unlike other fodder cutting machines will work on non conventional energy source.
2. In countries like India where ample human power is available, such human powered man machine systems will help to a great extend to improve the economical condition and employability of such countries.
3. Such systems are of utmost importance in Asian countries as almost all Asian countries are facing electricity scarcity which results in ten to twelve hours load shedding in rural areas.

## References

[1]. Modak J.P. et all, "Manufacturing of Lime- flyash-sand bricks Using Manually Driven Bricks Making Machine" a project sponsored by Maharashtra Housing & Area Delvelopment Authority, (MAHDA), Mumbai, India.

- [2]. Modak, J. P. and Bapat, A. R., "Formulation of Generalized Experimental Model for a Manually Driven Flywheel Motor and its Optimization", *Applied Ergonomics*, U.K., Vol. 25, No. 2, pp 119-122, 1994.
- [3]. Modak J. P. and Bapat A. R. "Various efficiency of a Human Power Flywheel motor" *Human Power*, USA International Human Power Vehicle Association No. 54, pp 21-23 Spring 2003.
- [4]. Modak J. P. "Design and development of manually energized process machines having relevance to village / agriculture and other productive operations" *Human Power*, USA International Human Power Vehicle Association no 58 pp 16-22, Fall 2004.
- [5]. Modak, J. P. and Katpatal A.A., "Design of Manually Energized Centrifugal Drum Type Algae Formation Unit" *Proceedings International AMSE Conference on System, Analysis, Control and Design*, Layon (France), Vol. 3, 4-6 July 1994, pp 227-232
- [6]. Deshpande S. B., Modak, J. P. and Tarnekar S. B., "Confirming Application of human powered flywheel motot as an energy source for rural generation of electrical energy for rural applications, and computer aided analysis of battery charging process.", *Human Power*, USA International Human Power Vehicle Association no 58 pp 10-16 Summer 2009.
- [7]. David Gordon Wilson VITA volunteer: *Understanding the pedal power*. ISBN:0-86619-268-9.
- [8]. [8] Dhale A. and Modak, J. P., "Formulation of the approximate generalized data based model for oilseed presser using human powered flywheel motor as an energy source" *International Journal of Agricultural Engineering*.
- [9]. H. Schenk Jr. "Test Sequence and Experimental Plans, "Theories of Engineering Experimentation" McGraw Hill Book Co., New York.